

WORKING PROCESS



1. Independent dedusting system is adopted at the feeding mouth, to escape the cross contamination brought by dedusting ventilation network.
2. The inlet in the warehouse adopting multi-point feeding, which saves dumping distance, and saves manpower.

Raw Material Receiving Process



1. Independent cleaning up system and deironing system for powder and pellet material, to make the following working steps normal work.
2. It is used to clean the impurities in the pellet and power material. Different screens can be chosen by the materials.

Raw Material Cleaning Process



1. FC for the feeder making the load of hammer mill to the best, and making the hammer mill work with full load.
2. To grind various pellet type material. Choosing different hammer mills by different feed types and grinding fineness.

Grinding Process



- Adding various kinds of liquids controlled by computer and add 1-3 different kinds of liquid per time.

Conveying Process



1. Same material can be entered the bin by different routes and will not affect the receiving of other materials which is flexible.
2. Different material enters their own bin, which is accurate and can clean the dust inside.

Material Distribution to Warehouse Process



1. Batching bins combines with the eccentric taper bucket and deformation bucket, efficiently avoid lump.
2. Discharge and weigh automatically according to predetermined formula, with anti-slip system, accurate measurement, printing automatically.

Automatic Batching Process



1. Micro element adding mouth adopts independent pulse filter, which controls the dust in the working surroundings.
2. Double shaft high efficiency mixer mixes materials according to the recipe with high evenness and short circle. The discharging adopts the big door opening structure with fast discharging and less residue.

Mixing Process



1. It is used for all kinds of liquid adding which can add 1-3 different kinds of liquid per time.
2. Micro computer automatically controls, adopting the weighing type measuring way, more accurate and reliable.
3. The tank and pipes can be thermal insulation.

Oil & Liquid addition Process



1. Strengthening and conditioning treatment before pelleting, making the material curing by steam and then pressing into pellets.
2. The main transmission of the pellet mill adopts the high precision gear transmission, which is low faulty, easy operation, high efficient, energy conservation. It is stable and reliable.

Pelleting Process



1. Counter flow cooler is adopted with the good effect of evenly cooling. Octagonal cooling bin, without residue.
2. Crumbler output is big, the effect is evenly and yield is high. The material does not need crumbling can pass through other path.

Cooling and Crumbling Process



1. Rotary screener screens the powder and broken material in the pellet feed. Balance weight adopted provides slight vibration, low noise and stable working.
2. Screen pressing structure is simple and easy to be replaced. Single, double and triple layers of screens can be chosen (to meet different demands).

Screening Process



1. Adding wind cleaning system before finished products packing system to make sure granule quality.
2. Automatic weighing packaging system, automatic weighing, automatic zero elimination, automatic alarm, automatic accumulation and print record.
3. Automatic palletizing system for automatic stacking and automatic loading.

Bagging Process


Arif Gondal Feed

Ghakhar, Gujranwala

Poultry Feed Production Line Having capacity of 10 ton per hour



Samzon Engineering successfully completed a 10-ton per hour Poultry Feed Production Plant for Roshan Feeds, delivering a fully integrated, high-efficiency system designed for continuous production. The plant was installed in Gakhar, Gujranwala, and includes automated batching, grinding, mixing, pelletizing, cooling, and screening processes. With advanced machinery, precise control systems, and robust engineering standards, this project ensures consistent feed quality, reduced operational downtime, and maximum productivity for the client.

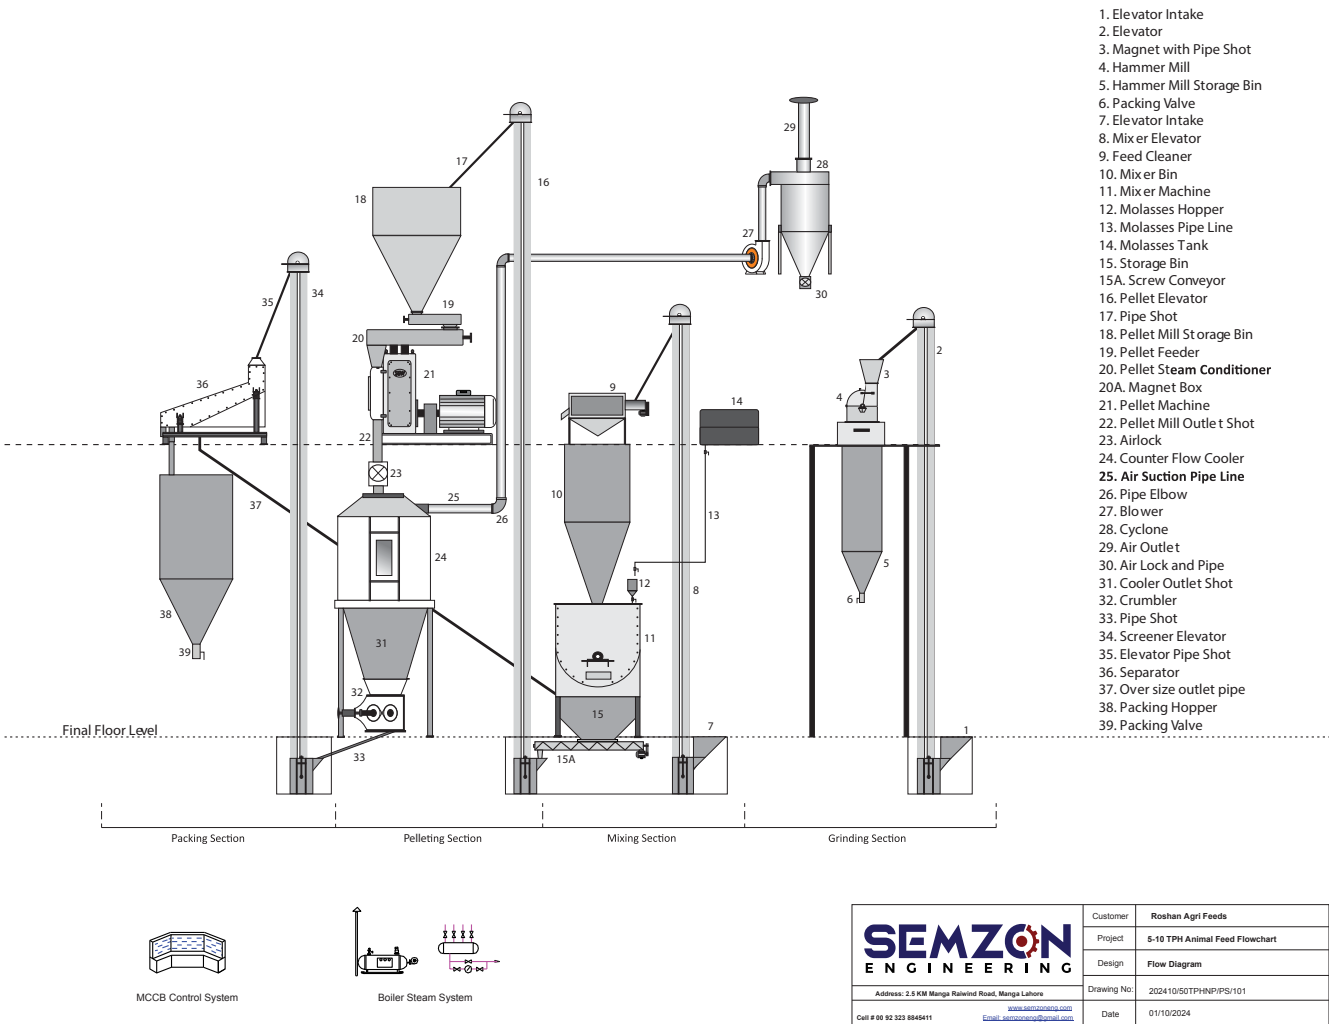

State: This drawing and design is copyright and remains the property of SEMZON Engineering. This must not be copied or used except on their order or with their permission.

PROJECTS

Albadar Feed
Kabul, Afghanistan


Poultry Feed Production Line Having
capacity of 20 ton per hour



Samzon Engineering successfully installed a 20-ton per hour Poultry Feed Production Line for Al-Badar Feed in Kabul, Afghanistan. This fully automated plant is engineered for high-capacity production, ensuring consistent feed quality and smooth operation across every stage—grinding, mixing, pelletizing, cooling, screening, and packing. With durable machinery, precise control systems, and optimized workflow design, the project delivers superior efficiency, reduced downtime, and long-term reliability for large-scale poultry operations.



SEMZON ENGINEERING	Customer	Albadar Feeds
	Project	20 TPH Poultry Feed Flowchart
	Design	Flow Diagram
	Drawing No.	202410/50TPHNP/PS/101
Address: 2.5 KM Marga Rainind Road, Marga Lahore		Date
Call # 99 92 323 886611		01/10/2024


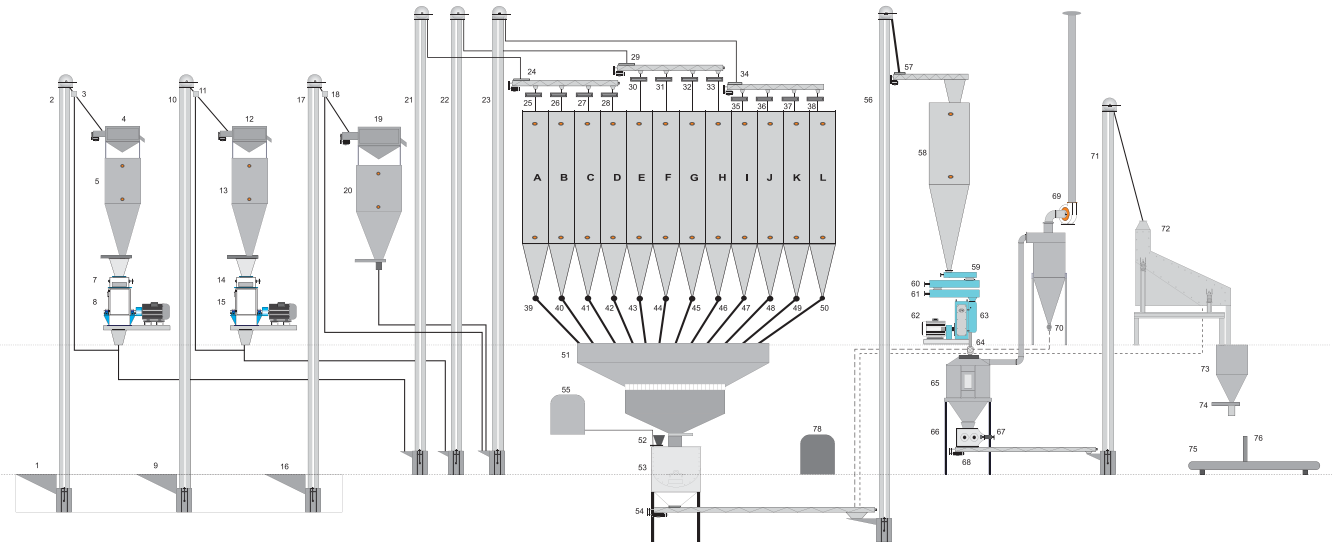


State: This drawing and design is copyright and remains the property of SEMZON Engineering. This must not be copied or used except on their order or with their permission.

Auriga BOP

Nooriabad, Karachi

BOP PLANT
capacity of 50 ton per Day

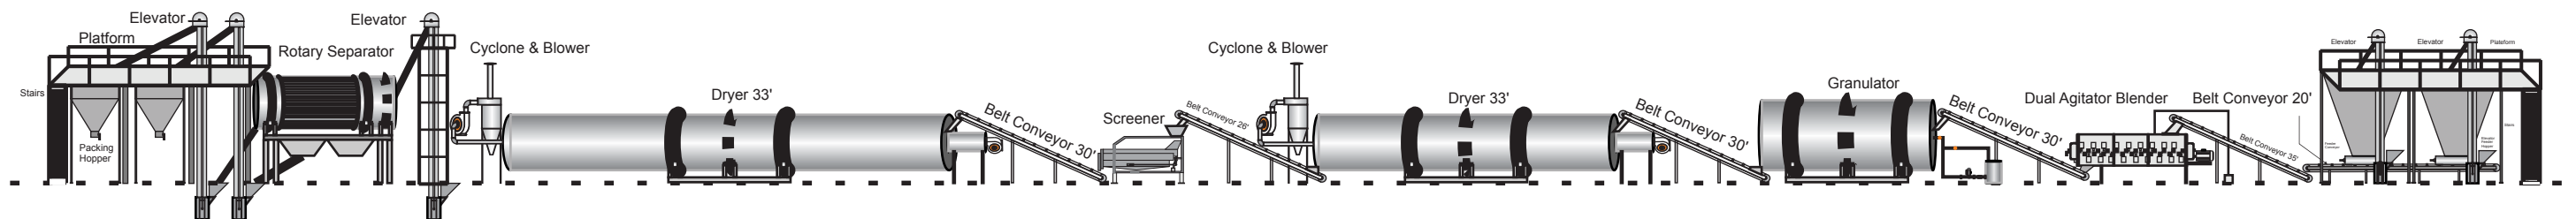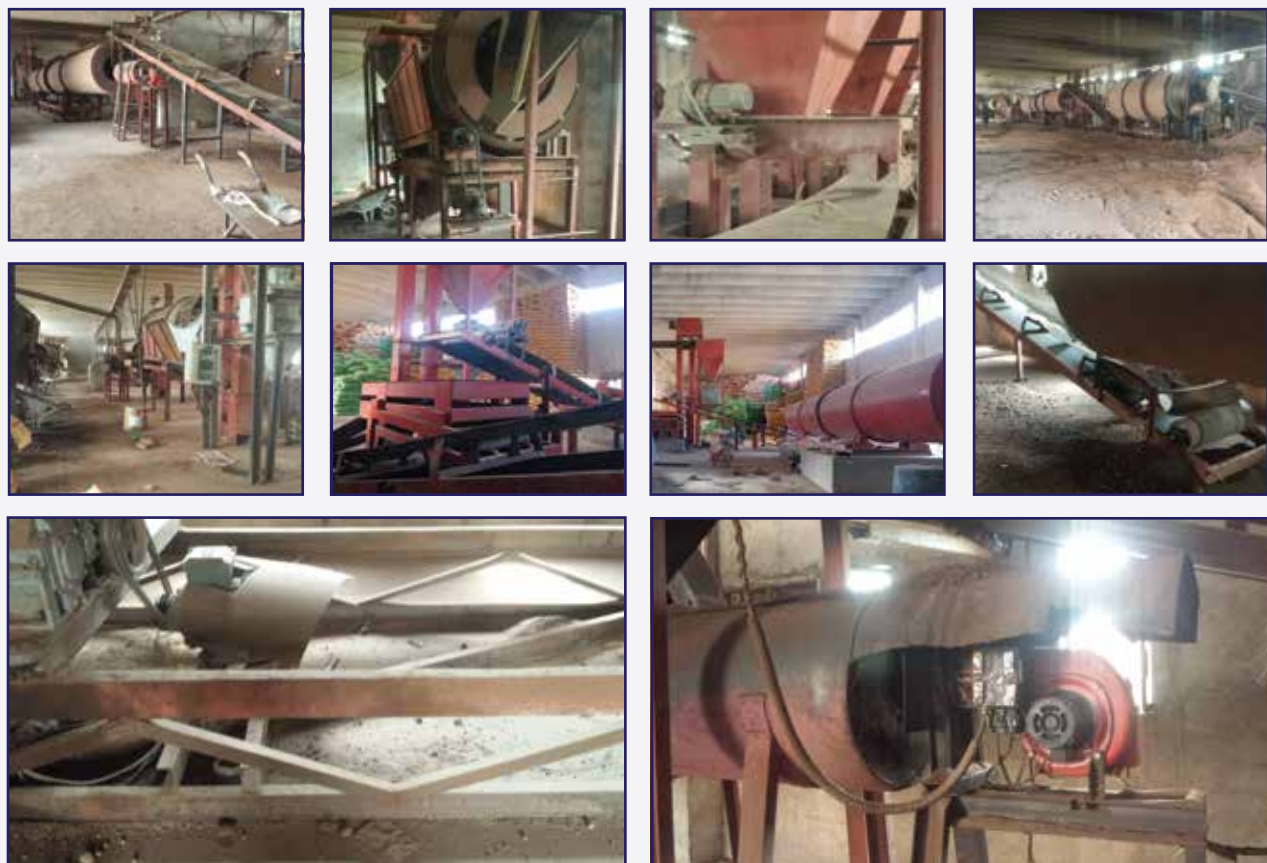


SEMZON ENGINEERING Address: 2.5 KM Mangla Rawalpindi Road, Mangla Lahore Call # 99 92 323 9845411	Customer	Auriga BOP
	Project	20 TPH Poultry Feed Flowchart
	Design	Flow Diagram
	Drawing No	20241050TPHNP/PS/101
	Date	01/10/2024

Quetta Waste Management Company

Quetta

Organic Compost Fertilizer Line
capacity of 50 ton per Day

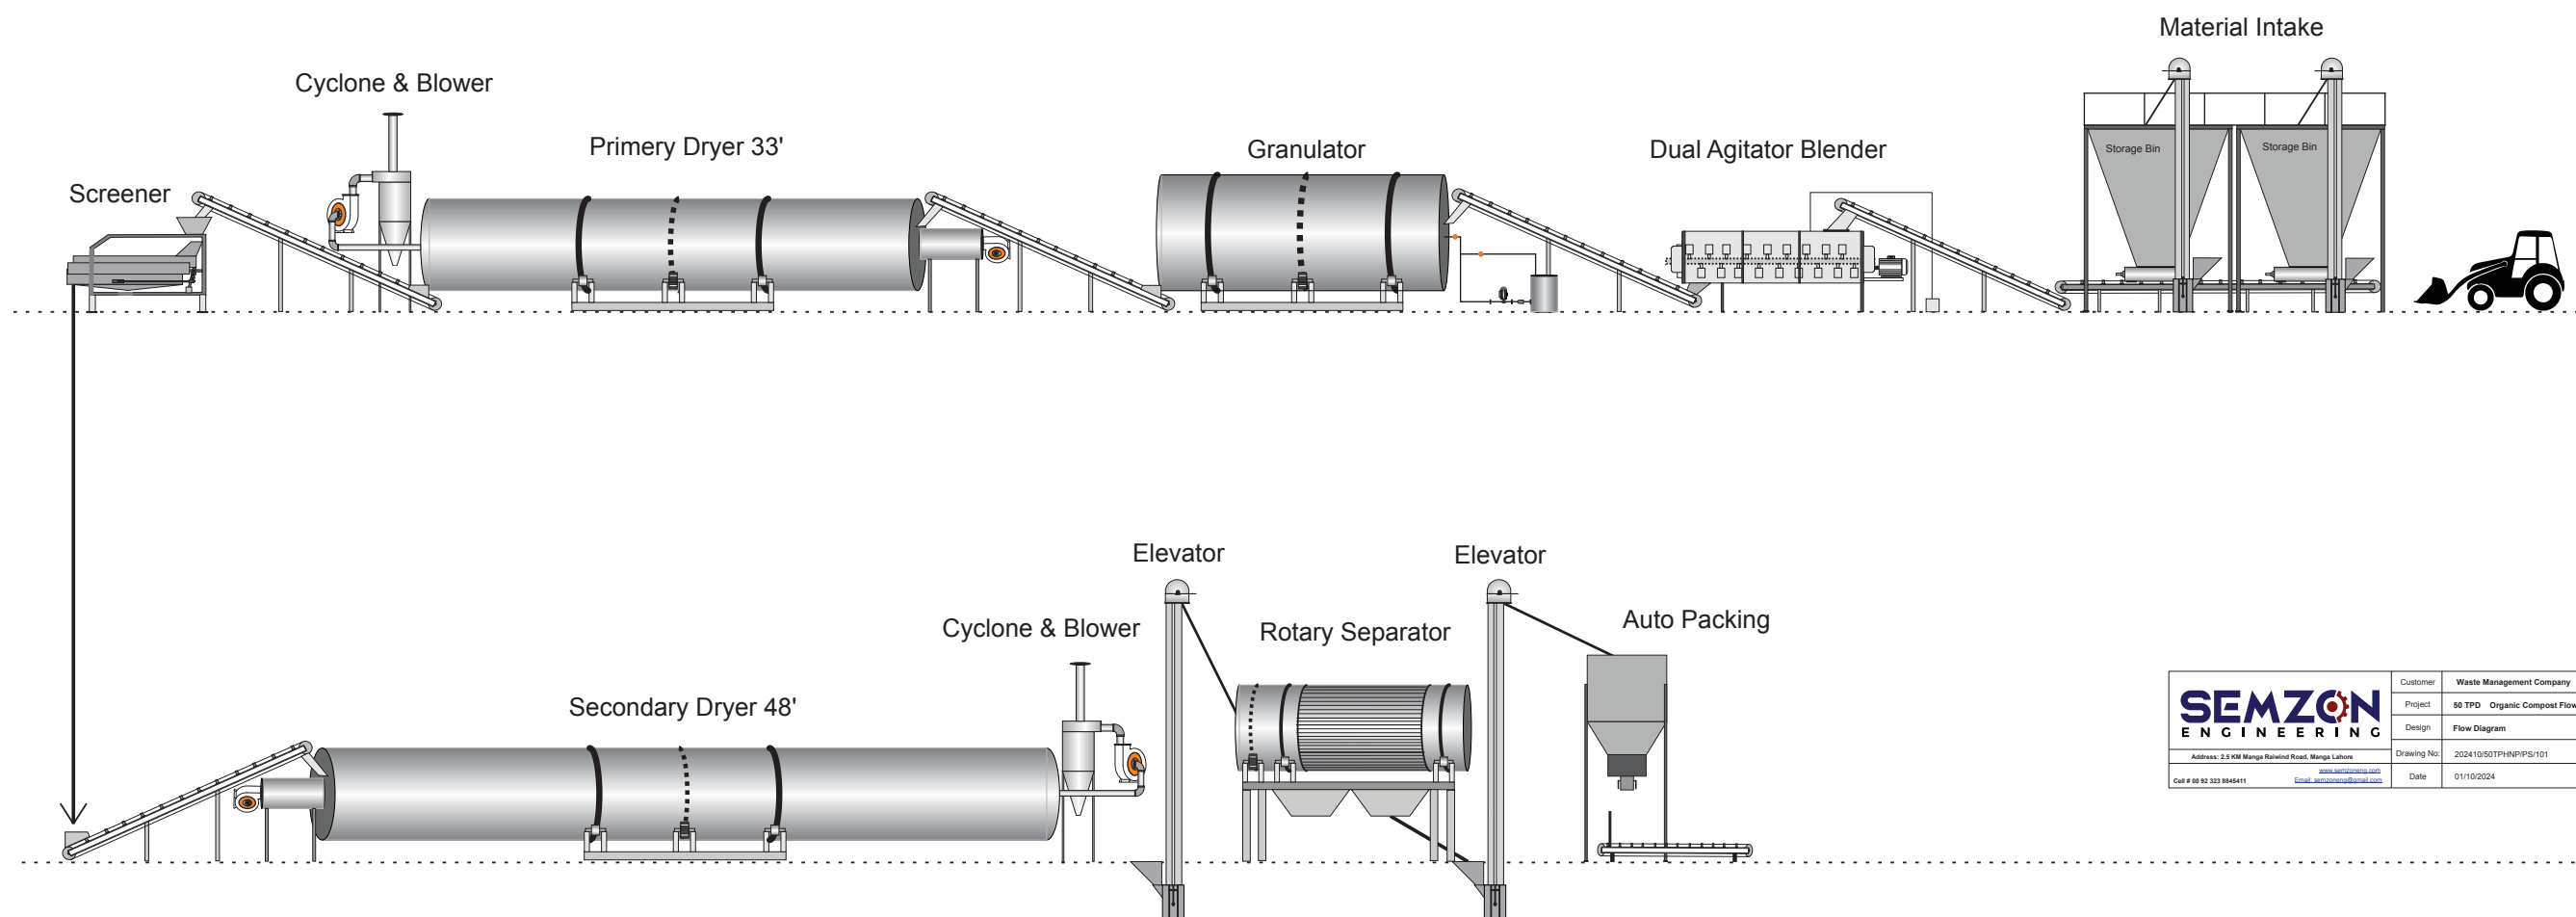


SEMZON ENGINEERING Address: 2.5 KM Murga Rawind Road, Murga Lahora Cell # 99 92 323 8845411 Email: semzon@gmail.com	Customer	Waste Management Company
	Project	50 TPD Organic Compost Flowchart
	Design	Flow Diagram
	Drawing No	202410/50TPD/NP/PS/101
	Date	01/10/2024

PARS Feed Mill

Qabola

Poultry/Cattle Feed Mill
capacity of 10 ton per Hour

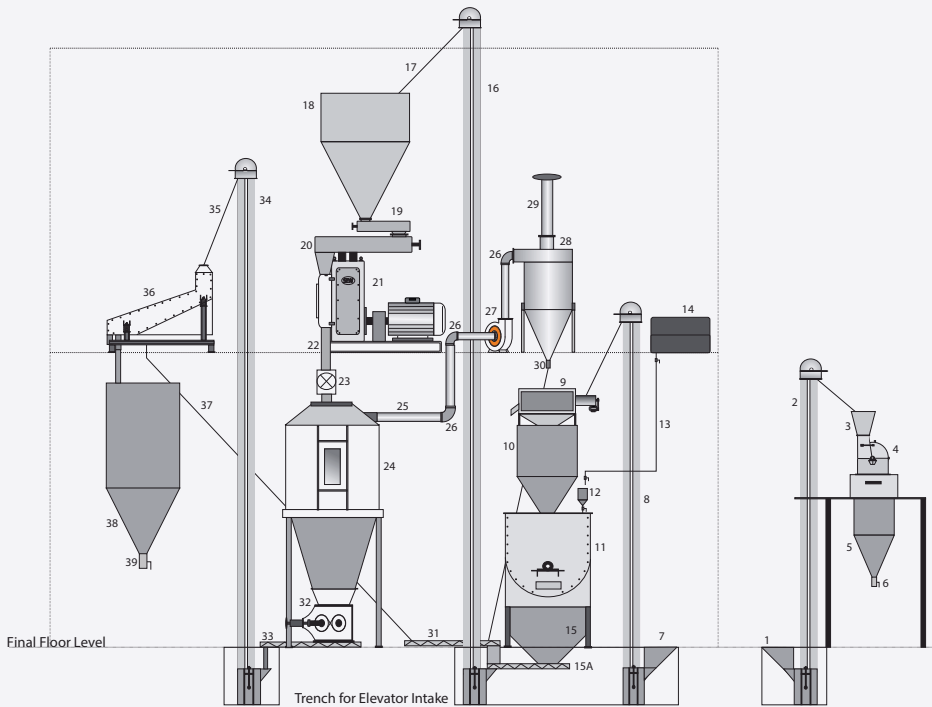


- 1. Elevator Intake
- 2. Elevator
- 3. Magnet with Pipe Shot
- 4. Hammer Mill
- 5. Hammer Mill Hopper
- 6. Packing Valve
- 7. Elevator Intake
- 8. Mixer Elevator
- 9. Feed Cleaner
- 10. Mixer Hopper
- 11. Mixer Machine
- 12. Molasses Hopper
- 13. Molasses Pipe Line
- 14. Molasses Tank
- 15. Mixer Out Hopper
- 15A. Mixer Screw Conveyor
- 16. Pellet Elevator
- 17. Pipe Shot
- 18. Pellet Mill Hopper
- 19. Pellet Feeder Conveyor
- 20. Pellet Steam Conditioner
- 20A. Magnet Box
- 21. Pellet Machine
- 22. Pellet Mill Outlet Shot
- 23. Airlock
- 24. Cooler
- 25. Air Suction Pipe Line
- 26. Pipe Elbow
- 27. Blower
- 28. Cyclone
- 29. Air Outlet
- 30. Air Lock and Pipe
- 31. Powder Conveyor
- 32. Cooler Outlet Shot
- 33. Screw Conveyor
- 34. Screener Elevator
- 35. Elevator Pipe Shot
- 36. Separator
- 37. Over size outlet pipe
- 38. Packing Hopper
- 39. Packing Valve

TITLE:	CAPACITY:	CLIENT:	DATE:	SHEET #	
Poultry/Cattle Feed Unit	Feed 7-10 ton/h		Sep, 2020	1/1	


Pak Pansy Fertilizer

Nooriabad, Karachi

Single Super Phosphate SSP
capacity of 50 ton per Day

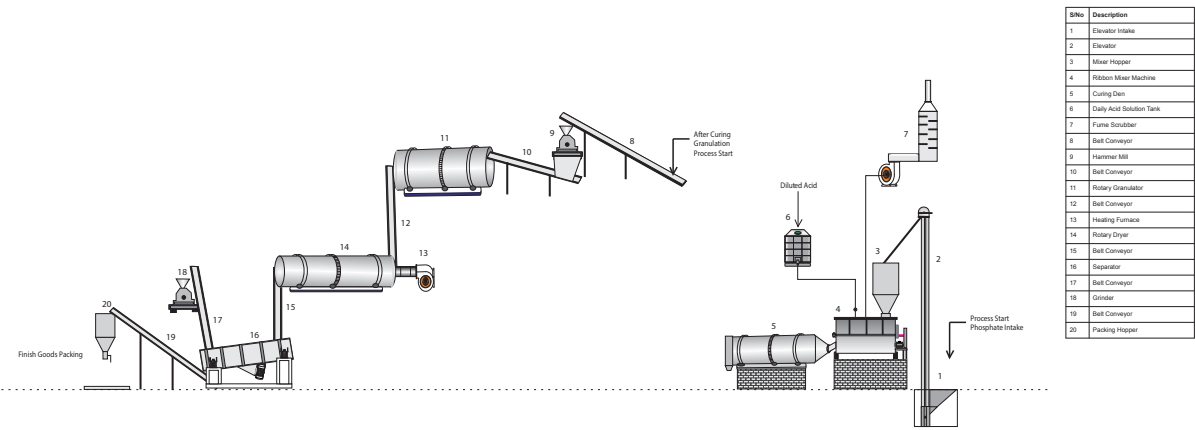

S.No	Description
1	Elevator Intake
2	Elevator
3	Mixer Hopper
4	Rotary Mixer Machine
5	Cutting Die
6	Daily Acid Solution Tank
7	Fume Scrubber
8	Belt Conveyor
9	Hammer Mill
10	Belt Conveyor
11	Rotary Granulator
12	Belt Conveyor
13	Heating Furnace
14	Rotary Dryer
15	Belt Conveyor
16	Separator
17	Belt Conveyor
18	Cooler
19	Belt Conveyor
20	Packing Hopper


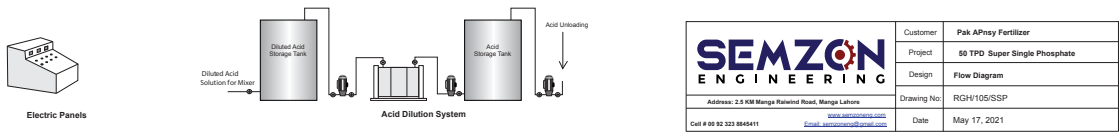


 Address: 25 KM Mangochi Road, Mangochi Call # 99 92 323 884411	Customer	Pak Pansy Fertilizer
	Project	50 TPD Super Single Phosphate
	Design	Flow Diagram
	Drawing No	RQH105SSP
	Date	May 17, 2021

Al- Itifaq Feeds Mills

Kasur, Punjab

Poultry Feed Production Line Having capacity of 20 ton per hour

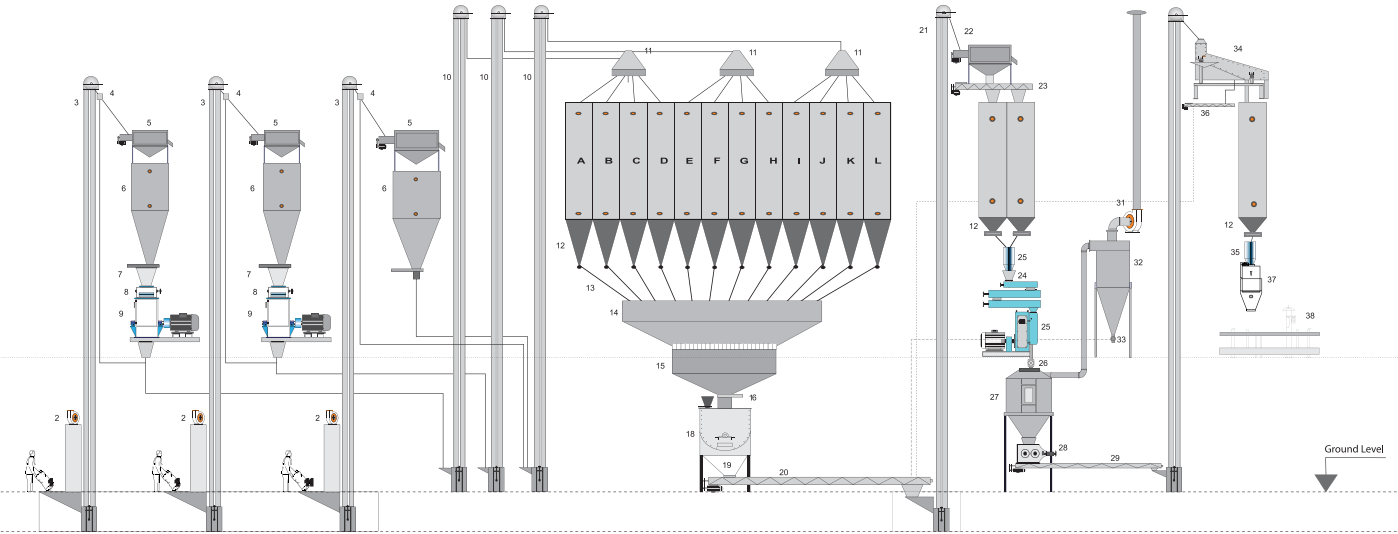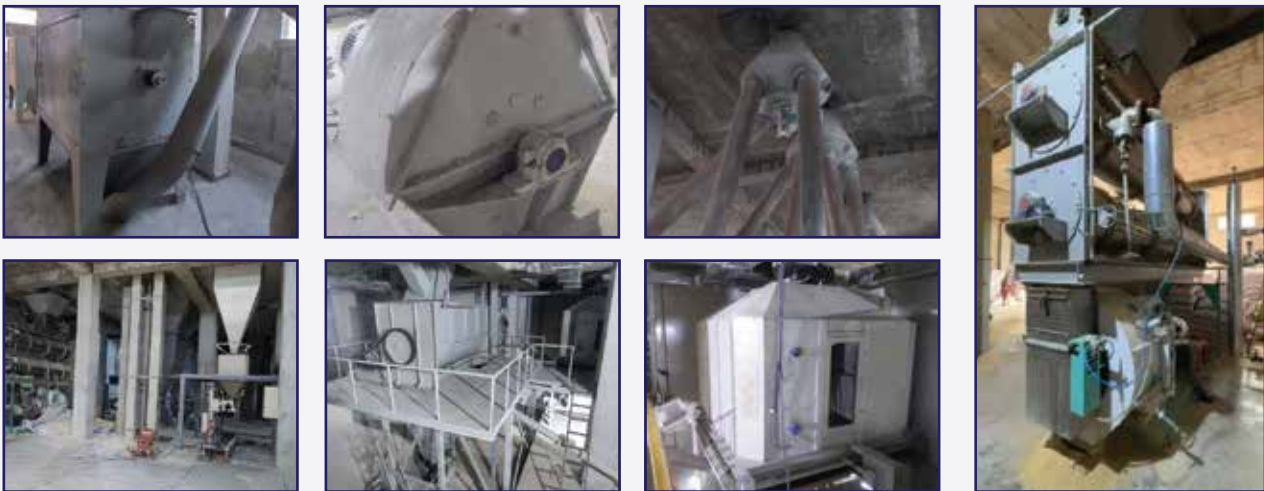

Pneumatic System

PLC Control System

Boiler Steam System

Liquid Addition System




Lifting Crane

SEMZON ENGINEERING Address: 2.5 KM Manga Raiwind Road, Manga Lahore www.semzon.com Call # 99 92 323 8845411	Customer	5-10 TPH Animal Feed Flowchart
	Project	5-10 TPH Animal Feed Flowchart
	Design	Flow Diagram
	Drawing No.	202410501PHNP/PS/101
	Date	01/10/2024

Subhan Feeds

Kasur, Punjab

Poultry Feed Production Line Having capacity of 20 ton per hour

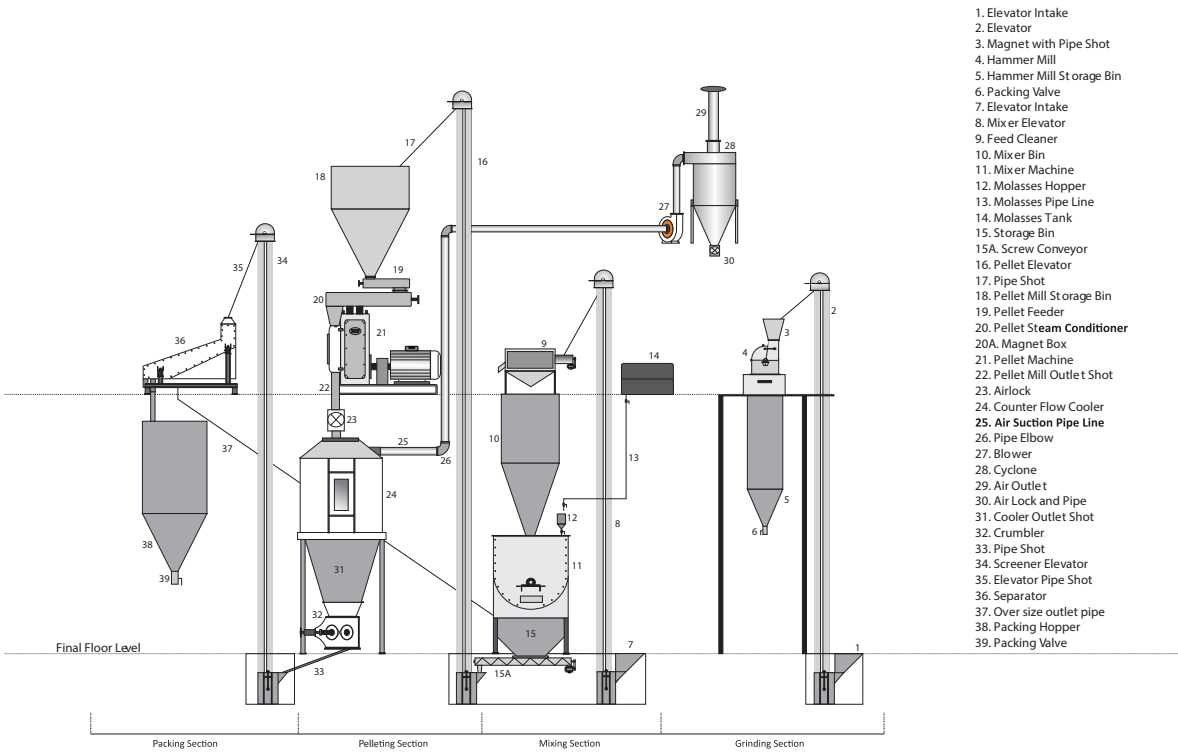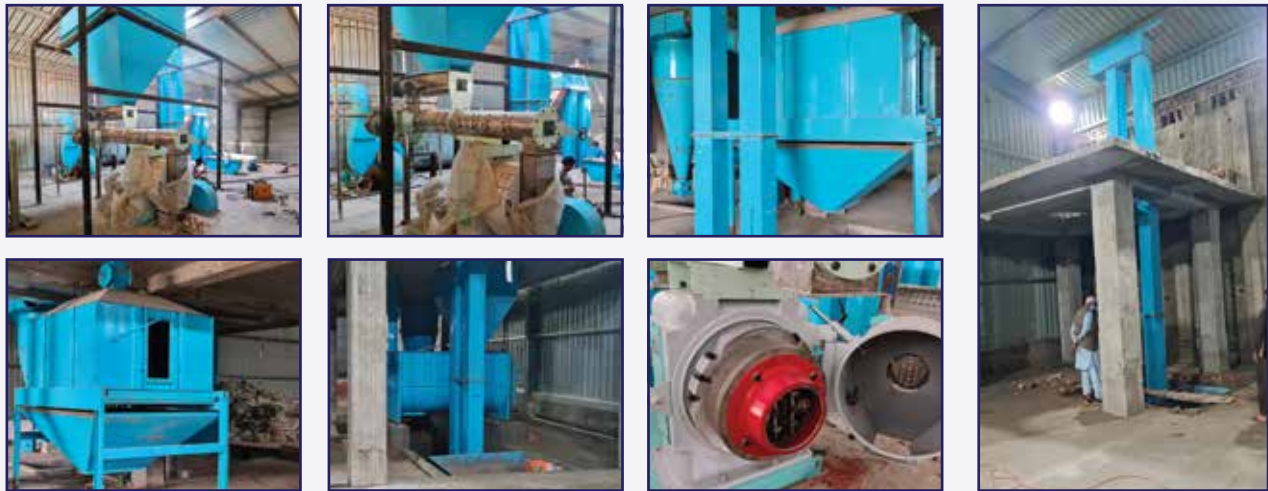



State: This drawing and design is copyright and remains the property of SEMZON Engineering. This must not be copied or used except on their order or with their permission.

SEMZON ENGINEERING Address: 2.5 KM Mangla Road, Mangla, Lahore Cell # 99 92 323 8845411 www.semzon.com info@semzon.com	Customer	
	Project	5-10 TPH Animal Feed Flowchart
	Design	Flow Diagram
	Drawing No	20241010TPHNP/PS/101
	Date	01/10/2024

Roshan Agri feed

Kasur, Punjab

Poultry Feed Production Line Having capacity of 10 ton per hour

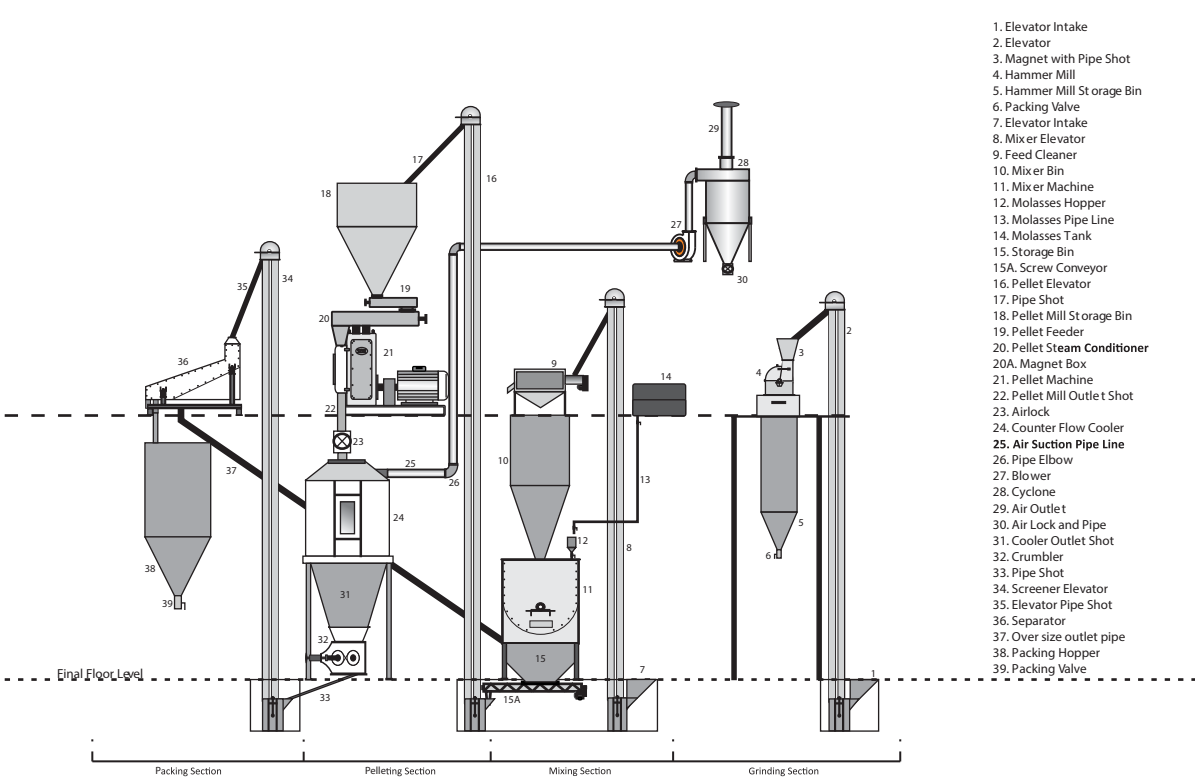

State: This drawing and design is copyright and remains the property of SEMZON Engineering. This must not be copied or used except on their order or with their permission.

SEMZON ENGINEERING Address: 2.5 KM Mangla Road, Mangla, Lahore Cell # 99 92 323 8845411 www.semzon.com info@semzon.com	Customer	
	Project	5-10 TPH Animal Feed Flowchart
	Design	Flow Diagram
	Drawing No	20241010TPHNP/PS/101
	Date	01/10/2024

Vibro Bio Energy

Manga Mandi, Lahore

Biomass Wood Pellet Production Line Having capacity of 2 ton per hour

